


High Temperature Heat Resistance Cable

H-VV-Ni 350

Conductor : Nickel (1)
 Insulation : PTFE Impregnated Glass Fiber
 Max. Operating Temperature : 350°C
 Max. Temperature Of Conductor : 450°C
 Test Voltage : 2000V
 Colour : Brown

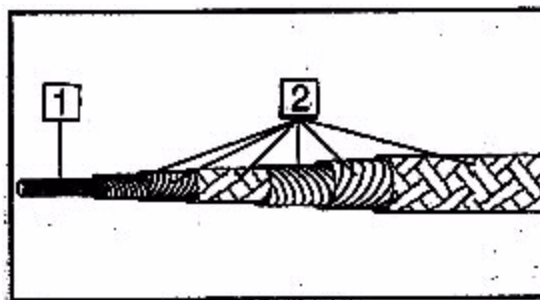


Cross Section (mm ²)	Formation	External Diameter (mmØ)	Max. Current at 330°C (Amp)
1.5	21 x 0.30	3.9	7
2.5	20 x 0.40	4.2	10
4.0	56 x 0.30	5.0	13.5
6.0	84 x 0.30	5.6	16
10.0	80 x 0.40	6.5	35

High Temperature Heat Resistance Cable

H-VV-Ni 280

Conductor : Nickel (1)
 Insulation : PTFE (2)+ Fiberglass PTFE Impregnated (3)
 Max. Operating Temperature : 280°C
 Max. Temperature Of Conductor : 450°C
 Test Voltage : 2000V
 Colour : Brown

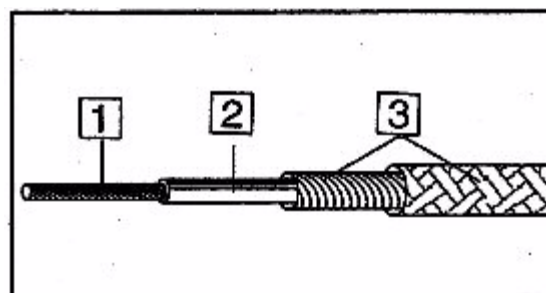

Cross Section (mm ²)	Formation	External Diameter (mmØ)	Max. Current at 330°C (Amp)
0.5	21 x 0.18	1.80	1.8
1.0	14 x 0.30	2.40	3.5
1.5	12 x 0.40	3.10	3.6
2.5	20 x 0.40	3.60	7.0
4.0	56 x 0.30	4.40	9.0
6.0	84 x 0.30	4.90	11.0