


## High Temperature, Stainless Steel / Nickel Ring Cable Lugs &

**Receptacles** a contact device installed at an outlet for the connection of an attachment plug and flexible cord to supply portable equipment or appliances.

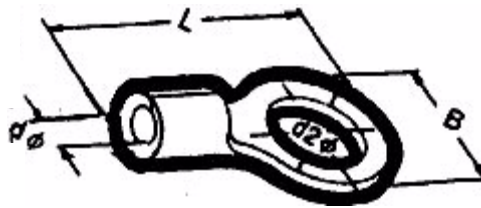

### A) Stainless Steel 304 , Non- Insulated Ring Terminal

Model	d2Ø	B	L	d
SUS CABLE LUG - 2.5MM SQ.	4.2	8.10	20.4	2.35
SUS CABLE LUG - 5.5MM SQ.	5.3	8.10	20.4	3.5
SUS CABLE LUG - 10MM SQ.	6.4	10.5	21.5	4.8

### B) Steel Nickel Plated, Non- Insulated Ring Terminal

Model	d2Ø	B	L	d
RN25-FE - 2.5MMSQ. RING LUG	5.3	9.55	17.0	2.35
RN55-FE - 5.5MMSQ. RING LUG	5.3	9.55	19.60	3.5



### C) Steel Nickel Plated, Non- Insulated Receptacles

Model	B	L	d
FDN2-250-FE - 2.5MM SQ. TAB	6.7	15.5	2.35
FDN5-250-FE - 5.5MM SQ. TAB	6.7	15.5	3.5