


Illuminated Indicator Light

Series 9000

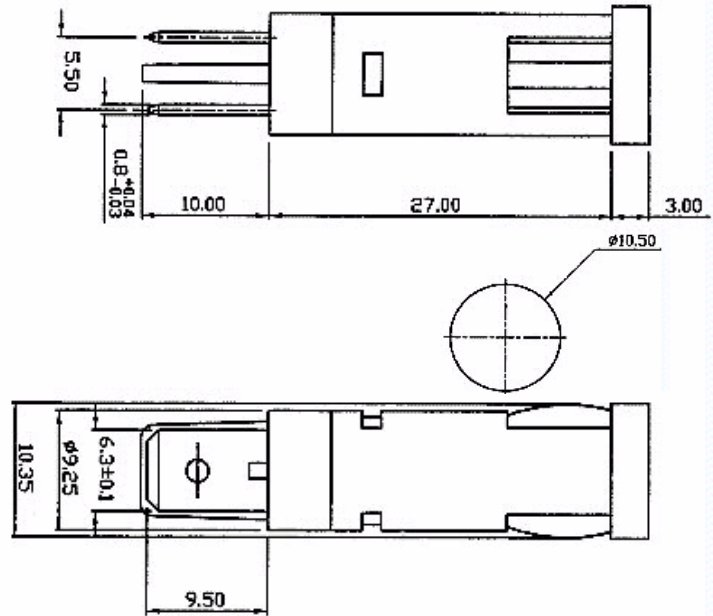

Technical Data


Rating	: 240 ~ 250VAC, 0.3W
Terminal Type	: 6.3 x 0.8mm Quick Connector
Flammability	: UL 94V -2 minimum
Resistance to Tracking	: PTI 250
Life	: Neon Lamp ≥ 30,000 hours
Material	: Base: Nylon 6/6 : Lens: Polycarbonate
Panel Cut Out Size	: 9.6mmØ +/-

Model	Rating	Colour
SERIES 9000-RED	250Vac, 0.3W	Red
SERIES 9000-AMBER	250Vac, 0.3W	Amber
SERIES 9000-GREEN	250Vac, 0.3W	Green

Illuminated Rocker Switches



Series 52

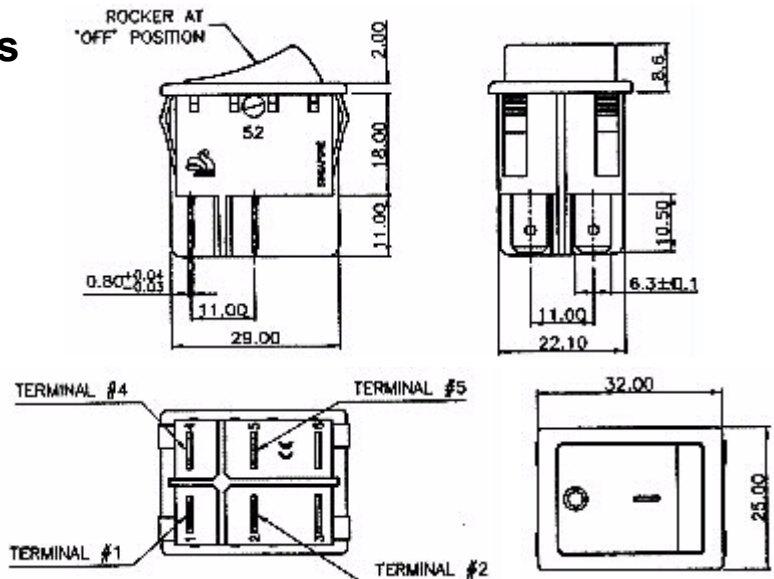

Technical Data

Rating	UL	: 15A, 250VAC (File no. 59618)
	CSA	: 15A, 250VAC (File no. 52381)
	VDE	: 16(6)A, 250VAC (License no. 129570)
	SEMKO	: 16(6)A, 250VAC (Cert. no. 0114037/01-02)
	CQC	: 16(6)A, 250VAC (Cert. no. CQC05003012803)
Circuit/ Function	: DPST/ ON-OFF, Illuminated	
Terminal	: 6.3 x 0.8mm Quick Connect	
Contact gap	: > 3mm	Glow wire test : 850°C (category D)
Insulation Spacing	: > 8mm	Flammability : UL 94V-2 minimum
Contact Resistance	: < 20m initially	Resistance to Tracking : PTI 250
Dielectric Strength	: Up to 3.5 kV	Insulation Resistance : > 50 M (500VDC between the open contacts) initially
Endurance	: Mechanical Life > 100,000 Cycles	
	: Electrical Life > 20,000 Cycles at full load	
Panel Cut Out	Panel Thickness (mm)	1 (min.) 3 (max.)
	Cutout Size (mm)	30.0 x 22.5 30.2 x 22.5
Material	Button / Body / Button	: Nylon 6/6
	Illuminated Button	: Polycarbonate
	Terminals	: Copper Alloy
	Contacts	: Silver Alloy

Model	Rating	Colour
SERIES 52-RED	16(6) 250Vac	Red
SERIES 52-AMBER	16(6) 250Vac	Amber
SERIES 52-GREEN	16(6) 250Vac	Green