

**REACH**



ELECTRIC HEATING, SENSING &amp; CONTROLS

**HEATING PRODUCTS**

Cert. No.: SG02/00221

## GW&TW Commercial Catering Immersion Heater (Incoloy Sheathed) with Thermostat Pocket (Incoloy Sheathed)


1" BSP Screw threaded immersion heaters with thermostat pocket are ideal for water heating and also for weak solution. Benefit of including thermostat pocket, safety cutout devices like thermostat, thermal fuse, or temperature sensor can be put together with element. As heating element is Ø8mm Incoloy sheathed, it is more durable and has longer life span.

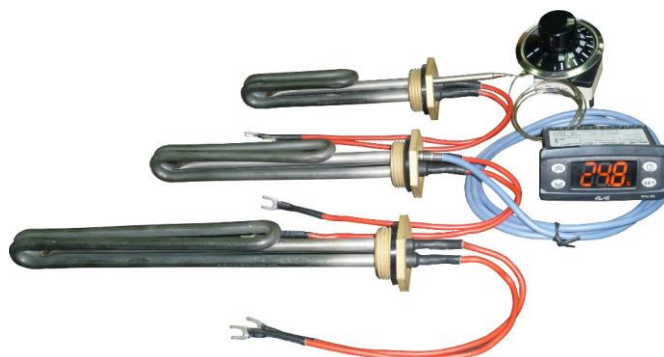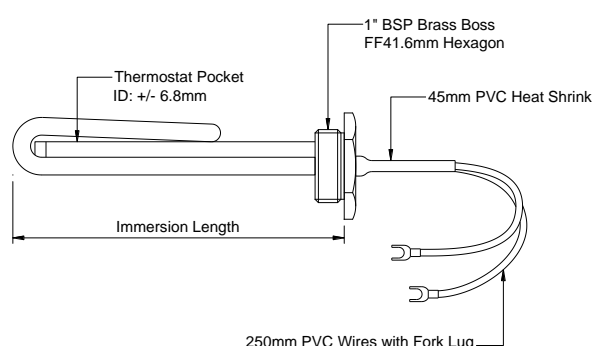

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-1201TP 1000W	240V	1000W	Incoloy 800	155mm	F/B (Short)
TW-1202TP 1.5KW	240V	2500W	Incoloy 800	155mm	F/B (Short)
TW-1200TP 2KW	240V	2000W	Incoloy 800	155mm	F/B (Short)
TW-1203TP 2.4KW	240V	2400W	Incoloy 800	155mm	F/B (Short)
TW-52W2TP 2.4KW	240V	2400W	Incoloy 800	197mm	F/B (Long)
TW-52W1TP 3.0KW	240V	3000W	Incoloy 800	190mm	F/B (Long)
TW-52W0TP 3.6KW	240V	3600W	Incoloy 800	180mm	F/B (Long)
TW-52Y0TP 4.8KW	240V	4800W	Incoloy 800	245mm	F/B (Long)

## Commercial Catering Element Immersion Heater (Bright Incoloy 800)

1" BSP Screw threaded immersion heater are ideal for water heating and also for weak solution. Sheath materials are incoloy 800 (Bright) for more durability and longer life span.

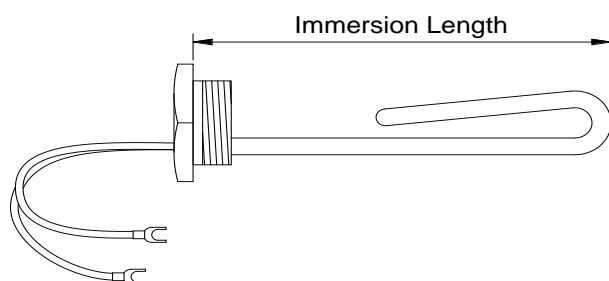

Model No.	Voltage	Wattage	Sheath Material	Immersion Length	Type
TW-1200 2000W (BRIGHT)	240V	2000W	Incoloy 800	155mm	F/B (Short)
TW-1203 2400W (BRIGHT)	240V	2400W	Incoloy 800	155mm	F/B (Short)
TW-52W1 3000W (BRIGHT)	240V	3000W	Incoloy 800	190mm	F/B (Long)

REACH ELECTRICAL (S) PTE LTD

51 Ubi Ave 1, #03-05, Paya Ubi Industrial Park, Singapore 408933

Tel: (65) 6296 6860 Fax: (65) 6298 1443

Email: [reach@singnet.com.sg](mailto:reach@singnet.com.sg) Website: <http://www.reachelectrical.com>

Company's Reg. No. : 199004352W G.S.T Reg. No. M2-0095215-4